


Finger trunking

USpace slotted 'finger' trunking/cable tidy is ideal for use in cabinets with fibre distribution. Slotted duct provides a neat and efficient means of supporting cables in numerous applications.

Open and tapered slot construction enables cables to be laid in as assembly wiring progresses with the lid being snapped into place securing installation.

Easily removable lid enables additional cables to be added at any time.

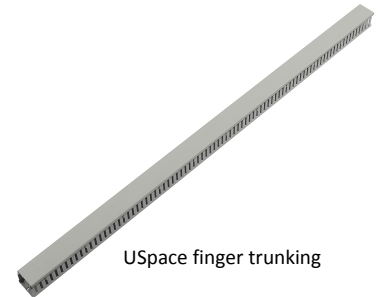

USpace finger trunking

Technical data

USpace finger trunking

Part number	Colour	Length	Width	Depth	Weight
RA0-0052-AA	Light grey	2m	50mm	50mm	2kg

Compatible with

USpace 4210, 7210, 7250, UCoustic and ColdLogik ranges

Other sizes are available on request

Fixings

4 x socket cap M6x16 bolts

4x M6 plain washers

4 x M6 full nut

Materials and finish

Self extinguishing lead free PVC

Technical information

Capacity: up to 55% recommended

Service temperature range: -15°C to +65°C

Flammability: UL94 V-O rated

Approvals: ISO 9001, NATO A5536, IMQ, R.I.N.A., Bureau Veritas and CE

Standards: CE1, CSA, DIN43659, AFNOR, 42, CENELEC



Statement of conformity

